


## XM-8DR-BRD


XM-8DR-BRD I/O expander is dedicated for systems using RACS CLK/DTA protocol. Expander offers eight NO/NC inputs and eight relay outputs with single contact 1.5/30VDC rated. Optionally, XM-8DR-BRD can be used as standalone device (without communication with master device), when so, its outputs are controlled by signals applied to its inputs.

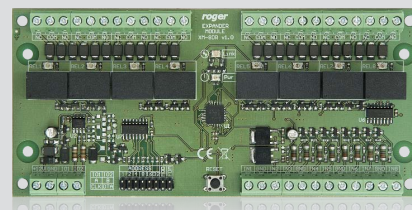

## Features:

- Eight NO/NC inputs
- Eight relay outputs with single NO/NC contact 1.5A/30VDC rated
- RACS CLK/DTA communication protocol
- Electronic module only
- Can also operate in standalone mode as relay module

## XM-8DR-BRD view and dimensions

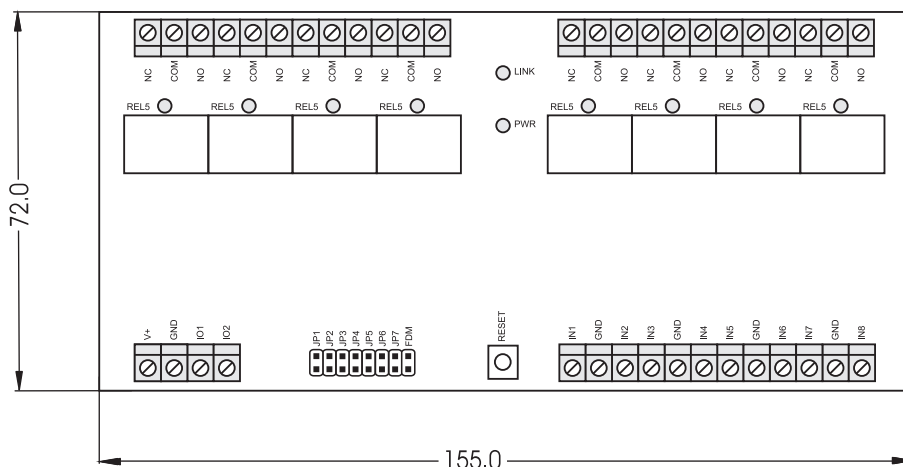

### Available versions and symbols

Symbol	Description
<b>XM-8DR-BRD</b>	Standard version

### Technical Specification

Parameter	Value
<b>Supply voltage</b>	12 VDC (acceptable 10-15V)
<b>Current consumption</b>	25mA plus 40mA per each activated relay
<b>Environmental class (according to EN 50131-1)</b>	Class IV, temperature: -25°C +60°C, relative humidity: 10 to 95% (non-condensing), indoor conditions
<b>Dimensions</b>	155 x 72 mm (WxH)
<b>Weight</b>	≈115g
<b>Certificates</b>	CE

ROGER sp.j  
Gościszewo 59  
82-400 Sztum  
Poland

**T.** +48 55 272 0132  
**F.** +48 55 272 0133  
**E.** roger@roger.pl  
**I.** www.roger.pl